

Recessed Decorative LED Office luminaire

HARLE

Description

Harle is a unique fitting, designed to give interest to any environment. The optic diffusers are optimised for even light distribution across the surface of the luminaire. The state of the art LED sources guarantee that this is all achieved with very low energy consumption of up to 95lm/w, far exceeding Part L energy targets.


Harle is designed for either 15mm or 24mm exposed grid systems with 600mm Tees. Options are available for various ceiling types and air handling, Dali etc.

Harle is an ideal solution for numerous areas where something slightly different is required for visual interest, it is an ideal replacement for fluorescent luminaires and can offer great savings and a fast pay back. (Please email for more details if



Dimensions

594mm (square) x 120mm (deep)

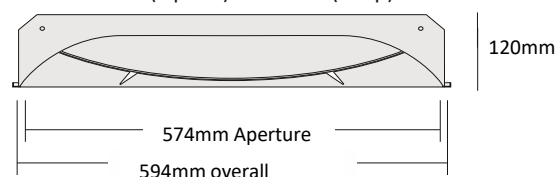

Options

Information

Description

DALI Dimmable
Emer 3 hour remote
Emergency EMPRO
Surface mounted ceiling bracket
Colour Temperature (Standard 4000K)
for 3000K
Air handling
1200mm x 300mm (nom)
500mm x 500mm (nom)

Add to part code

/DALI
/EM3
/EMPRO
/CB
/3K
/AH
Contact office
Contact office

Light Source: LED
Wattage: Various see options
Housing: Steel finished in RAL9010
Reflector: Opal
RA: >80
Control: DALI driver available
Weight: 3.76 kg
Ambient temp: -25°C to 35°C
Lifetime: 50,000 hours

Standard options

4000K 2641lm 28w 94lm/w 600mm

Order code

60843128