


Description


KBL Flex is mounted within a flexible IP65 silicon encased mould. KBL Flex is suitable for numerous applications due to its IP rating and flexibility. Popular applications are perimeter lighting, swimming pools, hand rails, step lighting to name a few. KBL Flex is available in RGB, 2700K, 4000K or 6000K. Dimmable via Dali/DMX/0-10v. All KBL Flex has rear cable entry as standard to assist continuous lighting effect when connecting together. Both side and end cable entry are available.

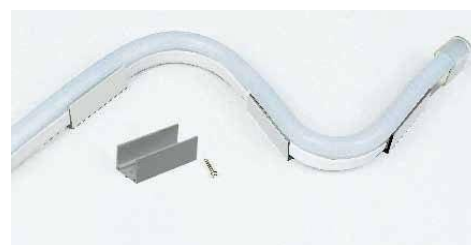

Continuous connector

Options

Information

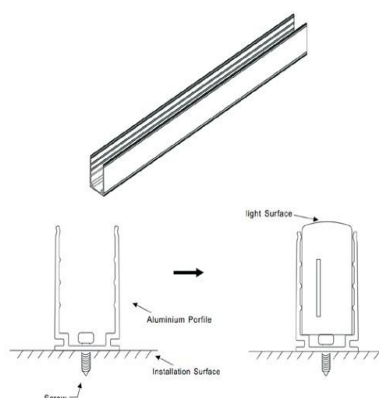

Profile option

Light Source:	LED
Voltage	24vDC
Power	12W/m
Output	320lm/m
CRI	>80
CCT	2400 ~ 6500K
Colour option	RGB
Dimensions Flat	11.5 x 21mm
Domed	11.5 x 29mm
Cable entry	side, rear or middle
Minimum cut length	100mm
Minimum bend	120mm Ø
Maximum run length	10Mts
IP rating :	IP65
Bending Ambient temp:	0°C to 45°C
Working Ambient temp:	-20°C to 45°C
Lifetime:	60,000 hours
Remote Driver:	Maximum distance of 10mts from KBL Flex

Standard options

Order code

Please email with specific requirements.