

Recessed Architectural LED Downlighter


Chaffinch

Description

Chaffinch is a small LED Downlighter, extremely popular with all our Clients. In terms of design and features it offers both comfort and efficiency with numerous options. An ideal solution for numerous applications due to its features. Chaffinch range has a deep set Tridonic full spectrum COB LED, fitted with an IP44 protective lens as standard. Having a Low Glare deepset, Tridonic driver, powered LED with the matt black Baffle and 40° reflector and the 24 super-fin die-cast heatsink.

Other options are available, white softlight baffle is a favourite. Chaffinch Chaffinch is an ideal replacement for LV downlighter which not only brings savings in energy but also saves lamp replacements.

Please contact us if you require any additional information.

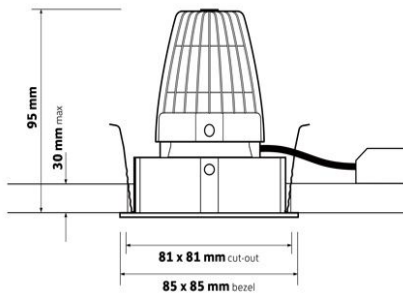

Standard minimal glare baffle



With white softlight baffle

Options

Description	Add to part code
White finish	/Standard
Dali dimmable	/DALI
1-10v dimming	/1-10V
Emer 3 hour remote	/EM3
Emergency EMPRO	/EMPRO
White softlight baffle	/WSB
Narrow Beam	/NB
Ra90 colour rendering	/9

Information

Light Source:	LED
Wattage:	Various see options
MacAdam:	3SDCM
IP rating :	IP20 rear IP44 front
Control:	DALI driver available
CRI:	>80
UGR:	<19
Weight:	.3kg
Ambient temp:	-25°C to 35°C
Lifetime:	50,000 hours

Standard options

Standard options	Order code
553lm 8.0W 2700K	7824108
582lm 6.5W 3000K	7834106
620lm 6.5W 4000K	7844106
753lm 10W 2700K	7824110
769lm 7.5W 3000K	7834107
816lm 7.5W 4000K	7844107

Standard options

Standard options	Order code
1027lm 13.5W 2700K	7824113
1124lm 11.5W 3000K	7834111
1191lm 11.5W 4000K	7844111