


Description

Swift is a LED surface bulkhead, comprising of Tridonic CLE module and opal polycarbonate diffuser designed to give minimum glare and uniform light distribution. We achieve an outstanding luminaire efficacy of up to 124lm/w. All data is actual.

Swift can be ceiling or wall mounted and has a variety of trims to enhance its appearance and create a stylish installation. Swift has a fixed output with overload protection and nominal 50,000+ hours life. Swift has the option of presence detection in either dimming or on/off, this ensures savings are made.

Please see accessories for standard trim options.

Please contact us for any special requirements

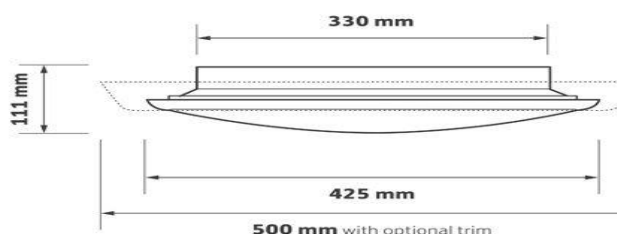

Options

Description

White finish
White trim
Brushed Aluminium trim
Chrome trim
DALI Dimmable
Emer 3 hour integral
Emergency EMPRO
Sensor on/off
Sensor dim (10/100%)
Prismatic lens

Add to part code

Standard
/WT
/BAT
/CT
/DALI
/EM3
/EMPRO
/SO
/SD
/PO

Standard options

1698lm 3000K 16.6W
1874lm 4000K 16.6W
2376lm 3000K 21W
2618lm 4000K 21W

Order code

6834116
6844116
6834121
6844121

Information

Light Source: LED
Wattage: Various see options
Housing: Anodised aluminium
Reflector: Polycarbonate
IP rating : IP20
Control: DALI driver available
CRI: >80
Weight: 2kg
Ambient temp: -25°C to 35°C
Lifetime: 50,000 hours
Optical Efficiency: 88%