

Recessed Decorative LED Office luminaire



TANAGER

Description

Tanager is a unique fitting, designed to give interest to any environment. The MPO diffuser is optimised for even light distribution across the surface of the luminaire and UGR19. The state of the art LED sources guarantee that this is all achieved with very low energy consumption, far exceeding Part L energy targets.

Tanager is designed for either 15mm or 24mm exposed grid systems with 600mm Tees. Options are available for various ceiling types and air handling, Dali etc.

Tanager is an ideal solution for numerous areas where something slightly different is required for visual interest, it is an ideal replacement for fluorescent luminaires and can offer great savings and a fast pay back. (Please email for more details if survey required)

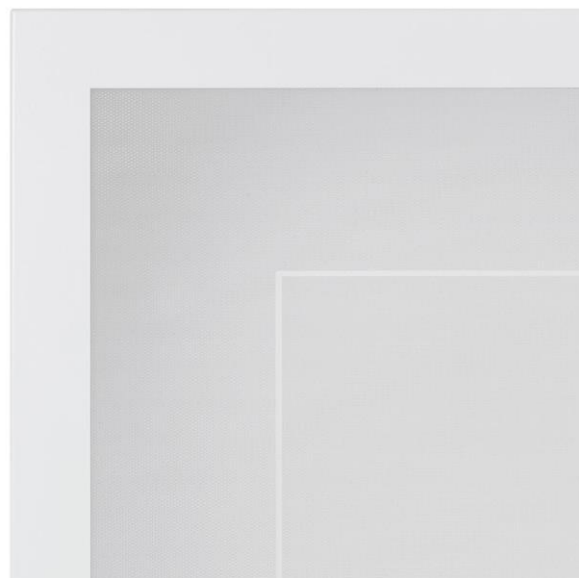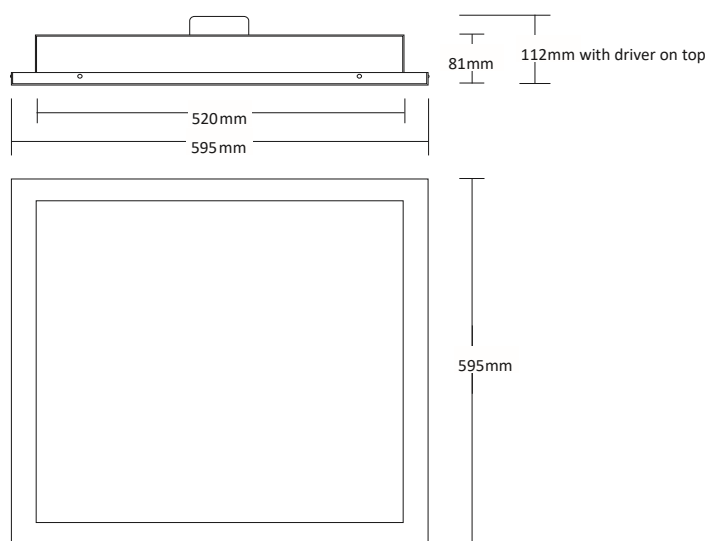

Options

Information

Description

DALI Dimmable
Emer 3 hour remote
Emergency EMPRO
Colour Temperature (Standard 4000K)
for 3000K
Air handling
500mm x 500mm (nom)
SAS Ceiling
Plasterboard ceiling
No detail in MPO

Add to part code

/DALI
/EM3
/EMPRO
/3K
/AH
Contact office
Contact office
/PC
/ND

Light Source: LED
Wattage: Various see options
Housing: Steel finished in RAL9010
Reflector: Opal
CRI: >80
UGR: <19
Control: DALI driver available
Ambient temp: -25°C to 35°C
Lifetime: 50,000 hours+

Standard options

3095lm 29W 4000K 600 x 600 (nom)
3385lm 32W 4000K 600 x 600 (nom)
3737lm 35W 4000K 600 x 600 (nom)
3068lm 29W 4000K 1200 x 300 (nom)
3240lm 32W 4000K 1200 x 300 (nom)

Order code

5984429
5984432
5984435
588442912
588443212

More standards available, please contact us.