

Suspended/Surface Architectural LED Circular luminaire

Minla O2



Description

Minla O2 is a Suspended architectural circular fitting with direct downlight or up/downlight. Designed with Tridonic LEDs and driver to give maximum performance and energy consumption, complies with EN60598, ICEL1004 and ISO9001. The high transparent acrylic opal diffuser is optimised for giving an even light distribution across the surface of the fitting and the housing can come in any RAL colour to suit specific installations requirements. Numerous sizes, 800mm, 1000mm, 1200mm, 1500mm, 1800mm, 2000mm (nominal).

Minla O2 is a superb solution for numerous applications, creating interest to any space. It has a shallow depth and can be suspended at any height, perfect for high ceiling installations.

[Please contact us](#) for more information

Lengths available 800mm, 1000mm, 1200mm, 1500mm, 1800mm and 2000mm (nominal)

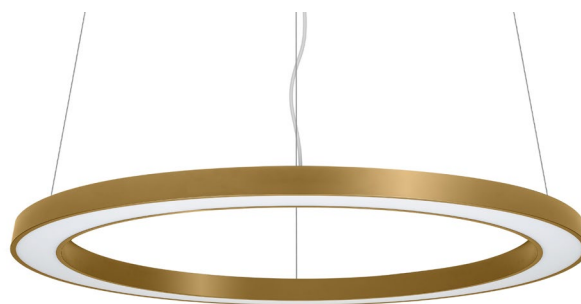

Options

Description

Add to part code

White finish	/Standard
Black finish	/Blk
Any RAL colour	Please contact office
Dali dimmable	/DALI
Direct only	Standard
Direct/Indirect	/DID
Emer 3 hour integral	/EM3
Emergency EMPRO	/EMPRO
Suspension	/Standard
3000K	/3K

Information

Light Source:	LED
Wattage:	See product codes
Housing:	Aluminium
Standard Reflector:	Opal
MacAdam:	3SDCM
IP rating :	IP20
Control:	DALI driver available
CRI:	>80
Depth:	93mm
Weight:	Please ask office
Ambient temp:	-25°C to 35°C
Lifetime:	50,000 hours+

Standard options

Order code

4680lm 4000K 54.5W 800mm	77844154-02-800
2808lm 4000K 33W 800mm	77844133-02-800

Please contact office for your specific requirements