


Description

Owl5 LED exit sign consists of 14 high output white LEDs and comes complete with full set of legend panels (EC and ISO). With a slim design, clip frame for ease of fitting legends and ease of installation with its first fix plate OWL5 exit range offers an attractive solution for the majority of your exit sign requirements.

Owl5 luminaires are available with mains only or 3 hour Maintained emergency operation. Maintained versions can be used for standard switched mains lighting but will automatically provide emergency lighting in the event of a complete loss of mains supply. Non-maintained operation is only available by excluding a switched live supply. Owl5 uses the latest high efficiency LEDs, an energy efficient battery charger/driver circuit and Nickel Cadmium (NiCd) batteries. Owl fully complies with the relevant parts of EN60598.2.22. Integral DALI/Self test are available as an option in accordance with BSEN62034 or fully interoperable DALI operation when connected to a DALI control system.. Please contact us for any further information required.

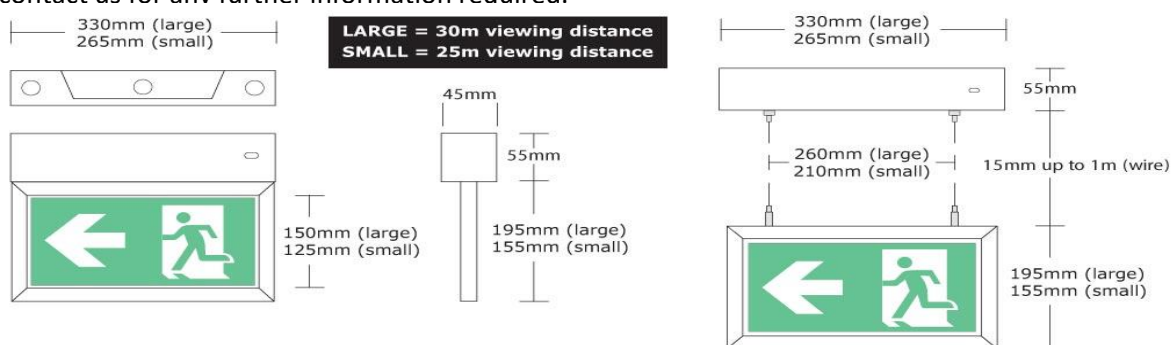

Options

Information

Description

Maintained Emergency
 Non-maintained
 DALI Dimmable
 Self Test
 Extra Legends
 Flag pole Mounting

Add to part code

Standard
 Wire as NM
 /DALI
 /ST
 /OWL5LEGENDS
 /FP

Light source: 14 x 5000K LEDs
 Supply voltage: 230V-50Hz
 Battery: 3.6V 900mAh NiCd
 Installation class: Class II
 Supply voltage: 230V-50Hz
 Supply Power: 2.1W
 Charged Power (Typical): .8W
 IP rating: IP20
 Viewing distance: 25 or 30mts
 Cable Entry: Top and back (first fix)
 Gear tray: First fix plate
 Weight: 2.5kg max
 Ambient temp: 25°C

Standard options

Wall/Ceiling mounted, Maintained, Switched maintained Non-maintained, 3 hour with complete set of EC & ISO, format legend panels (right/left/up/down) 25m viewing distance

Suspended mounted, Maintained, Switched maintained Non-maintained, 3 hour with complete set of EC & ISO, format legend panels (right/left/up/down) 25m viewing distance

Wall/Ceiling mounted, Maintained, Switched maintained Non-maintained, 3 hour with complete set of EC & ISO, format legend panels (right/left/up/down) 30m viewing distance

Suspended mounted, Maintained, Switched maintained Non-maintained, 3 hour with complete set of EC & ISO, format legend panels (right/left/up/down) 30m viewing distance

Order code

OWL5-8541WC25E3

OWL5-8541SM25E3

OWL5-8541WC30E3

OWL5-8541SM30E3