


Description

Linnet/IK10 IP65 LED Moisture proof luminaire is available for surface or suspended installations. Linnet/IK10 is made from robust injection moulded polycarbonate body with clear vapour proof impact diffuser. The Tridonic LEDs strips are covered with an opal diffuser for visual comfort. High system efficacy to aid compliance with Building Regulations Part L and quick release flush mounted fixing clips with an option for stainless steel.

Linnet/IK10 are ideal for installations with low ambient temperatures ideal for undercover car parks as well as warehouse, back of house and food areas, to name a few.

Dimming, sensor and emergency are all an option along with other options as below. It is an ideal replacement for fluorescent luminaires and can offer great savings and a fast pay back. (Please email for more details or if survey required)

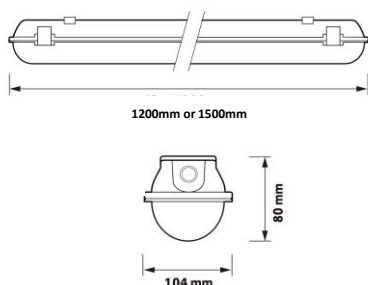

Options		Information	
Description	Add to part code	Light Source:	LED
DALI Dimmable	/DALI	Wattage:	Various see options
Emer 3 hour integral	/EM3	Housing	Polycarbonate
Sensor on/off	/SO	Diffuser	Opal
Stainless steel clips	/SS	IP rating:	IP65
Wall bracket	/WB	Impact protection:	IK10
Sus kit 1.5m	/SK1.5	Power Factor:	>0.9
		MacAdam:	3SDCM
		Colour rendering:	Ra80
		Lifetime:	50,000 hours+
		Maximum Weight:	3kg & 4kg
		Ambient temp:	-25°C to 35°C
Standard options	Order code		
1863lm 14w 3000K 1200mm	3836114-IK10		
1903lm 14w 4000K 1200mm	3846114-IK10		
4086lm 36w 3000K 1200mm	3836136-IK10		
4212lm 36w 4000K 1200mm	3846136-IK10		
2319lm 17w 3000K 1500mm	3836117-IK10		
2367lm 17w 4000K 1500mm	3846117-IK10		
5103lm 44w 3000K 1500mm	3836144-IK10		
5265lm 44w 4000K 1500mm	3846144-IK10		