


Adjustable compact LED Downlighter

Sparrow SQ 2

Description

Sparrow SQ 2 is a small adjustable twin LED downlighter, in terms of design and features it offers both flexibility and efficiency and can be used either flush or adjustable making it an ideal solution for many feature applications. Sparrow SQ has a Tridonic LED module and is fitted with an IP44 protective lens as standard. Available in White, Brushed Aluminium or black, other RAL colours available on request.

Sparrow SQ is also available in single, twin or triple versions enabling continuity throughout design. Please contact us for any further information or if a survey is required.

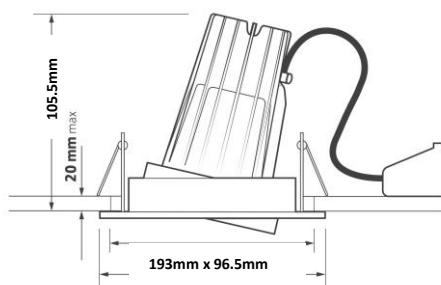

Options		Information	
Description	Add to part code		
White RAL9016 + darklight baffle	/Standard	Light Source:	LED
White Tilt body 20°	/Tilt	Light Source:	LED
Black Body	/BLK	Wattage:	Various see options
Black Tilt body 20°	/BLK/Tilt	MacAdam:	3SDCM
White softlight baffle	/WSB	IP rating :	IP20 rear IP44 front
Gold baffle	/GB	Control:	DALI driver available
IP54 ribbed Glass	/IP54	CRI:	>80
Honeycomb louvre	/HC	UGR:	<19
20° beam reflector	/NB	Weight:	.3kg
Dali dimmable	/DALI	Ambient temp:	-25°C to 35°C
1-10v dimming	/1-10V	Lifetime:	50,000 hours +
Emer 3 hour remote	/EM3		
Emer 3 hour remote DALI	/EM3D		
Standard options	Order code	Standard options	Order code
2 x 355lm 8.5W 2700K	19824108SQ2	2 x 992lm 14.3W 2700K	19824114SQ2
2 x 431lm 8.5W 3000K	19834108SQ2	2 x 1018lm 14.3W 3000K	19834114SQ2
2 x 450lm 8.5W 4000K	19844108SQ2	2 x 1105lm 14.3W 4000K	19844114SQ2
2 x 462lm 10.5W 2700K	19824110SQ2		
2 x 559lm 10.5W 3000K	19834110SQ2		
2 x 583lm 10.5W 4000K	19844110SQ2		