

Recessed Decorative LED Panel

BRENT


Description

Brent is a slim LED Opal fitting, the optic is bonded to the housing giving an IP65 seal from below and even, light distribution across the centre surface of the luminaire.

The Brent is designed for either 15mm or 24mm exposed grid systems with 600mm Tees. An option for surface mounting is available on request.


Brent is an ideal solution for numerous areas where something slightly different is required for visual interest.

Dimmable control gear is available along with other options as below, it is an ideal replacement for fluorescent luminaires and can offer great savings and a fast pay back.

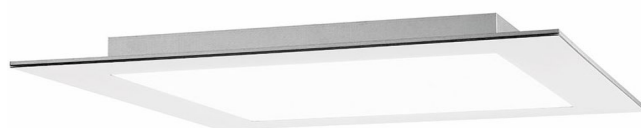

Dimensions

595mm (square) x 53mm (deep)

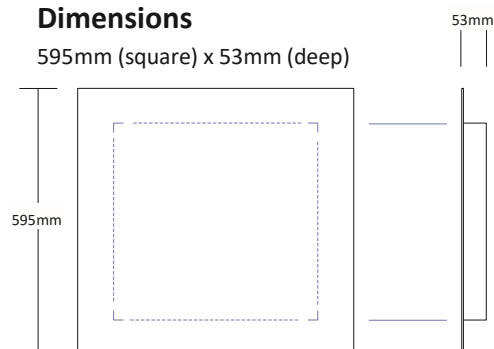

Options

Description

DALI Dimmable
Emer 3 hour remote
Emergency EMPRO
Surface mounted ceiling bracket
Suspension kit
Colour Temperature (Standard 4000K)

Add to part code

/DALI
/EM3
/EMPRO
/CB
/SUS

Information

Light Source: LED
Wattage: Various see options
Housing: Steel finished in RAL9010
Reflector: Opalised Central optic
IP rating : IP65 from below when recessed
Control: DALI driver available
Weight: 3.76 kg
Ambient temp: -25°C to 35°C
Lifetime: 50,000 hours

Standard options

4000K 3036lm 28.6W
4000k 3254.7lm 30.8W
4000k 3695lm 35.5W

Order code

14843128
14843130
14843135