

Recessed Architectural LED Downlighter SQ


Chaffinch SQ

Description

Chaffinch SQ is a small LED Downlighter, in terms of design and features it offers both comfort and efficiency with numerous options and an ideal solution for many applications. Chaffinch range has a deep set Tridonic full spectrum COB LED and also fitted with an IP44 protective lens as standard.

The darklight baffle assists with minimal glare but other options are available, white softlight baffle is a favourite.

Chaffinch SQ is an ideal replacement for LV downlighters which not only brings savings in energy but also saves any lamp replacements. Also available in twin and triple units. Please contact us for information.

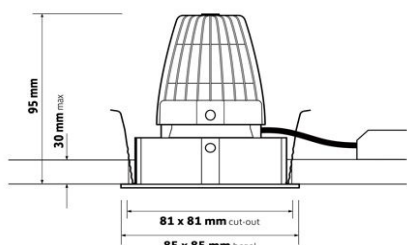

With white softlight baffle



Options

Information

Description

Add to part code

White finish, Black baffle	Standard
Dali dimmable	/DALI
1-10v dimming	/1-10V
Emer 3 hour remote	/EM3
Emer 3 hour DALI	/EM3D
White softlight baffle	/WSB
Standard Beam 40°	Standard
Narrow Beam 20°	/NB
Plaster in bezel version	/PI
Ra90 High colour rendering	/9
Surface box/housing	/SB

Light Source:	LED
Wattage:	See options
MacAdam:	3SDCM
IP rating :	IP20 rear IP44 front
Control:	DALI driver available
CRI:	>80
UGR:	<19
Weight:	.3kg
Ambient temp:	-25°C to 35°C
Lifetime:	50,000 hours

Standard options

Order code

753lm 10W 2700K	7824108-SQ
769lm 7.5W 3000K	7834108-SQ
816lm 7.5W 4000K	7844108-SQ
734lm 10W 2700K	7824108-SQ-WSB
749lm 7.5W 3000K	7834108-SQ-WSB
795lm 7.5W 4000K	7844108-SQ-WSB

Standard options

Order code

1027lm 13.5W 2700K	7824114-SQ
1124lm 11.5W 3000K	7834112-SQ
1191lm 11.5W 4000K	7844112-SQ
1000lm 13.5W 2700K	7824114-SQ-WSB
1095lm 11.5W 3000K	7834112-SQ-WSB
1161lm 11.5W 4000K	7844112-SQ-WSB