


Description

Artic 2 is a double LED frame luminaire, fully adjustable with exceptional efficacy of up to 121lm/W. For Artic 1 (Single) and Artic 3 (Triple) versions please see separate data sheet. Various housing and luminaire colour options as standard but can be any RAL colour. Ra90 as standard with option of Ra80, 3000K or 4000K available, Integral emergency and dimming also available.

The Artic range is popular for retail installations, restaurants, reception areas and many other applications. (Please email for more details if survey required)

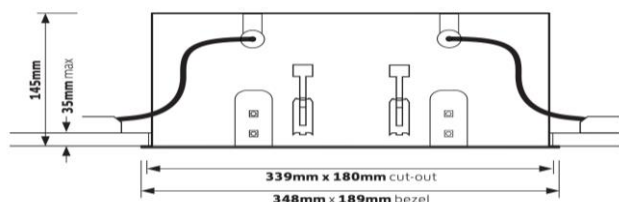

Options

Information

Description

Add to part code

White	Standard
Colour options	Available on request
DALI Dimmable	/DALI
Emer 3 hour remote	/EM3
Medium Beam	Standard
Narrow Beam	/NB
Wide Beam	/WB

Light Source:	LED
Wattage:	Various see options
Housing	Die-cast aluminium
Reflector	Multi-faceted
MacAdam	3SDCM
Power Factor	>0.9
IP rating :	IP20
Control:	DALI driver available
Weight:	1.7kg
Ambient temp:	-25°C to 35°C
Lifetime:	50,000+ hours

Standard options

Order code

3000k 7w Ra80 729lm x2	40183107.8-2-SA
4000k 7w Ra80 762lm x2	40184107.8-2-SA
3000k 15w Ra80 1611lm x2	40183115.8-2-SA
4000k 15w Ra80 1679lm x2	40184115.8-2-SA
3000k 18w Ra80 2079lm x2	40183118.8-2-SA
4000k 18w Ra80 2173lm x2	40184118.8-2-SA
3000k 24w Ra80 2691lm x2	40183124.8-2-SA
4000k 24w Ra80 2806lm x2	40184124.8-2-SA
3000k 30w Ra80 3264lm x2	40183130.8-2-SA
4000k 30w Ra80 3403lm x2	40184132.8-2-SA

Standard options

Order code

3000k 7w Ra90 617lm x2	40183107.9-2-SA
4000k 7w Ra90 662lm x2	40184107.9-2-SA
3000k 15w Ra90 1364lm x2	40183115.9-2-SA
4000k 15w Ra90 1462lm x2	40184115.9-2-SA
3000k 18w Ra90 1764lm x2	40183118.9-2-SA
4000k 18w Ra90 1892lm x2	40184118.9-2-SA
3000k 24w Ra90 2279lm x2	40183124.9-2-SA
4000k 24w Ra90 2444lm x2	40184124.9-2-SA
3000k 32w Ra90 2931lm x2	40183132.9-2-SA
4000k 32w Ra90 3144lm x2	40184132.9-2-SA