

LED Surface exit sign


OWL7 EXIT SIGN

Description

Owl7 LED exit sign consists of 15 high output white LEDs and comes complete with required legend panels, see options (EC and ISO).

Owl7 luminaires are available with mains only or 3 hour Maintained emergency operation. Maintained versions can be used for standard switched mains lighting but will automatically provide emergency lighting in the event of a complete loss of mains supply. Non-maintained operation is only available by excluding a switched live supply. Owl7 uses the latest high efficiency LEDs, an energy efficient battery charger/driver circuit and Nickel Cadmium (NiCd) batteries. Owl7 fully complies with the relevant parts of EN60598.2.22. Integral DALI/Self test are available as an option in accordance with BSEN62034 or fully interoperable DALI operation when connected to a DALI control system.

Please contact us for any further information required.

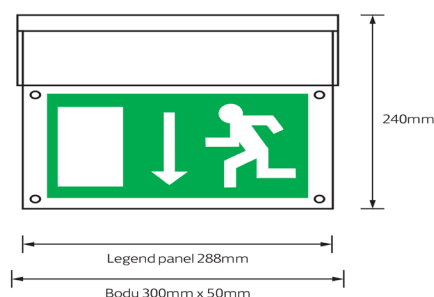

Options

Information

Description

Bezel finish Brushed Aluminium
Bezel finish white
Maintained Emergency
Non-maintained
DALI Dimmable
Self Test

Add to part code

Standard
/WH
Standard
Wire as NM
/DALI
/ST

Light source
Supply Power:
Charge Power:
Supply voltage:
Battery:
Recharge Period:
Installation class:
Supply voltage:
Viewing distance:
Ambient temp:
Weight:

15 x 5000K LEDs
4.4W
1.7W
230V-50Hz
Nickel Cadmium (NiCd) batteries
24 hours (max)
Class I
230V-50Hz
28mts
25°C
3kg

Standard options

Surface Exit sign Maintained emergency c/w EC Format Arrow Right/Left
Surface Exit sign Maintained emergency c/w EC Format Arrow Down
Surface Exit sign Maintained emergency c/w ISO Format Arrow Right/Left
Surface Exit sign Maintained emergency c/w ISO Format Arrow Down

Order code

OWL7-854136E3/ECRL/SUR
OWL7-854136E3/ECD/SUR
OWL7-854136E3/ISORL/SUR
OWL7-854136E3/ISOU/SUR