

Recessed Decorative LED Office luminaire

TANAGER



Description

Tanager is a unique fitting, designed to give interest to any environment. The MPO diffuser is optimised for even light distribution across the surface of the luminaire and UGR19. The state of the art LED sources guarantee that this is all achieved with very low energy consumption, far exceeding Part L energy targets.

Tanager is designed for either 15mm or 24mm exposed grid systems with 600mm Tees as standard. Options are available for various ceiling types and air handling, Dali etc.

Tanager is an ideal solution for numerous areas where something slightly different is required for visual interest, it is an ideal replacement for fluorescent luminaires and can offer great savings and a fast pay back.

Please contact us for more details if survey required

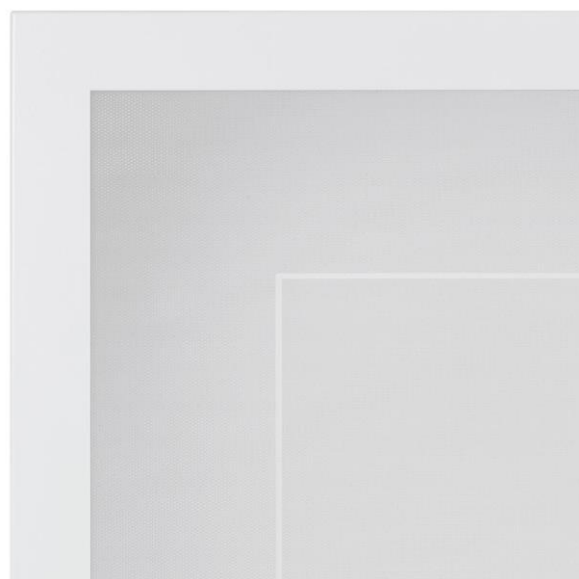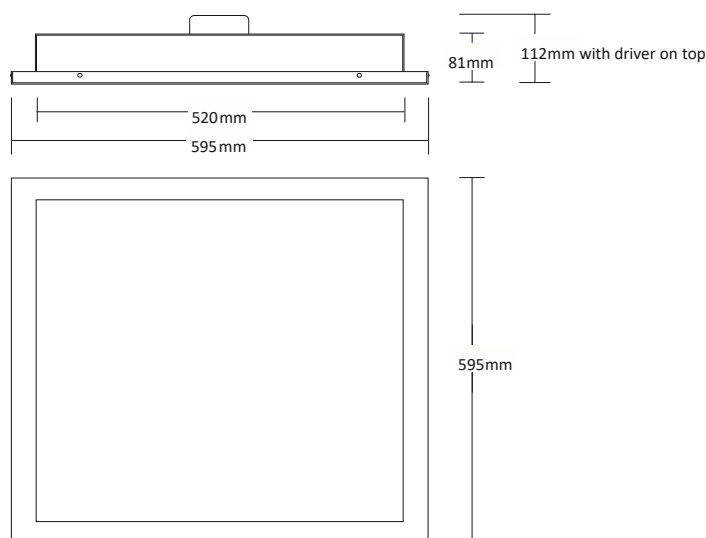

Options Information

Description	Add to part code	Information	
DALI Dimmable	/DALI	Light Source:	LED
Emer 3 hour remote	/EM3	Wattage:	Various see options
Emergency EMPRO	/EMPRO	Housing	Steel finished in RAL9010
3000K	/3K	Reflector	Microprism
Air handling	/AH	CRI:	>80
500mm x 500mm (nom)	Contact office	UGR:	<19
SAS Ceiling	Contact office	Control:	DALI driver available
Plasterboard ceiling	/PC	Ambient temp:	-25°C to 35°C
No detail in MPO	/ND	Lifetime:	50,000 hours+
No detail in Opal	/NDO	Colour Temperature:	4000K
CRI90	/CRI90		

Standard options

2134lm 20W 4000K 600 x 600 (nom)
3095lm 24W 4000K 600 x 600 (nom)
3737lm 35W 4000K 600 x 600 (nom)
3068lm 29W 4000K 1200 x 300 (nom)
3240lm 32W 4000K 1200 x 300 (nom)

Order code

5984420
5984424
5984435
588442912
588443212

More standards available, please contact us.