

Recessed LED Downlighter

TERN


Description

Tern is a stylish LED module luminaire designed for the comfort of the installation and environment. Comprising of long life LEDs giving constant, even, light distribution without any spotting. With its linear microprism, opalised central optic and graduated illumination across the side panels, it meets Part L2 energy targets whilst taking into consideration the LG7 criteria.

Tern has a steel housing finished in white RAL 9010 and is the perfect solution for any office, boardroom or numerous other areas.

Tern is designed for either 15mm or 24mm exposed grid systems with 600mm Tees as standard. Options are available for various ceiling types, air handling, Dali etc.

Dimmable control along with other options as below make Tern an ideal replacement for fluorescent luminaires and can offer great savings and a fast pay back. Please contact us for more details if survey required.

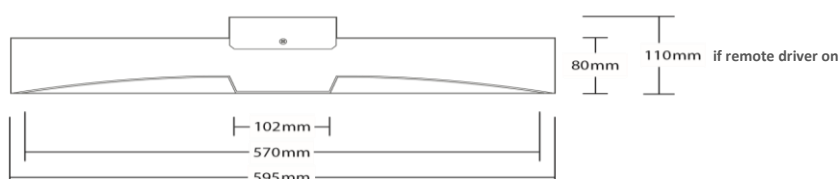

Options

Description

DALI Dimmak
Emer 3 hour remote
Emergency EMPRO
3000K
Air handling
500mm x 500mm (nom)
SAS Ceiling
Plasterboard ceiling

Add to part code

/DALI
/EM3
/EMPRO
/3K
/AH
Contact office
Contact office
/PC

Information

Light Source: LED
Wattage: Various see options
Housing: Steel finished in RAL9010
Reflector: Microprism, opalised centre.
CRI: >80
UGR: <19
Control: DALI driver available
Ambient temp: 20°C to 50°C
Lifetime: 50,000 hours+

Standard options

2134lm 20W 4000K 600 x 600 (nom)
3095lm 24W 4000K 600 x 600 (nom)
3737lm 35W 4000K 600 x 600 (nom)
3068lm 29W 4000K 1200 x 300 (nom)
3240lm 32W 4000K 1200 x 300 (nom)

Order code

30845120
30844124
30844135
30844129-1230
30844135-1230