


Self Contained LED Emergency Downlighter

OWL4 4854203

Description

Owl4 Self contained recessed or surface offers a simple method of stand alone emergency lighting solution for all Interior applications, with its clever design it incorporates various options with one part number. IP40 Recessed or surface. Standard DALI/Self-Test offers self-contained, non-maintained operation emergency lighting with integral automatic Self-Test or DALI communication from a single product. The excellent performance allows the units to be mounted at very wide spacing's making installation simple and cost effective.

Owl4 surface or recessed mounting enclosure houses an 'intelligent' proSeries DALI/Self-Test LED driver and a Lithium Iron Phosphate (Life) battery. A Nichia '3Watt' high power white LED is mounted in the fascia plate in conjunction with a choice of wide angle or 'corridor' distribution lens. As soon as Owl4 is switched on it operates as a self test unit, connect it to a DALI system and it provides full automatic testing.

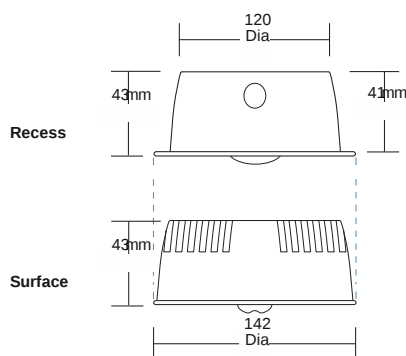

Options

Standard options

OWL4 complete

Order code

4854203

Owl Spacing's

Mounting height	Minimum 1 lux escape	Minimum 1 lux open
2mts	10mts	6.8mts
2.5mts	11mts	7.9mts
3mts	12mts	9.1mts

Information

Light Source:	LED
Wattage:	3W
Ingress protection	IP40
Protection against electric shock	Class II
Rated Voltage supply	220/240v AC
Mains frequency	50/60Hz
Mains Supply current	20mA
Emergency duration	3 hours
Battery recharge period	<24 hours
Battery discharge current — nominal	375mA
Ambient temp:	0°C to 35°C
Lifetime:	50,000 hours
Weight:	