


IP65 LED Bulkhead and exit sign

OWL Bulkhead

Description

Owl IP65 LED Bulkhead and exit sign consists of 16 high output LEDs and comes standard as constant current maintained with the option to wire as non-maintained (maintained or non-maintained operation is achieved by connecting or excluding a switched live supply). Owl provides 135 lumens (without legend) and the lens gives a wide distribution also offering 3 hour emergency lighting duration from integral Nickel Cadmium (NiCd) batteries.

Owl fully complies with the requirements of EN60598.2.22 and their low energy consumption assists compliance with Part L requirements. Typical long life of 50'000 hours, excellent energy efficiency and low operating temperatures therefore improving the life of the batteries and good operation at low ambient temperatures. DALI is available as an option. Please email for any further information required.

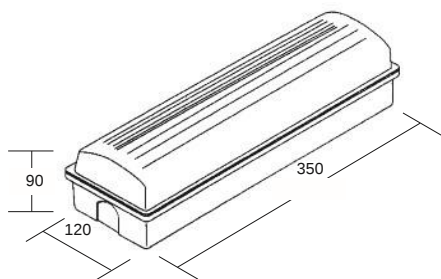

Options

Information

Owl Bulkhead Spacing's for emergency

Mounting height	Minimum 1 lux Axial to wall	Minimum 1 lux Axial to Axial
2.5mts	1mts	3mts
4mts	0.4mts	2.6mts

Maintained Emer bulkhead	Standard
Non-maintained	Wire above as non-maintained
Installation class	Class II
Ingress protection	IP65
Supply voltage	230V - 50Hz
Light Source:	LED
Supply power	2.4W
Charged power (typical)	1.7W
Lumen output	135 lumens max without legend
Dimensions (Surface)	350mm (L) x 120mm (W) x 90mm (H)
Cable Entry	20mm drilling points
Gear tray	Hinged white plastic
Construction	White polycarbonate base and clear fresnel lens
Emergency duration	3 hours
Ambient temp:	25°C
Weight Mains only:	0.9kg
Weight Maintained version:	1.1kg

Description

Add to part code

DALI option	/DALI
Self test option	/ST
Semi recessed kit	/SR

Standard options

OWL Mains only Bulkhead
OWL Maintained emergency Bulkhead
OWL Maintained emergency Bulkhead c/w self adhesive EC Legend kit
OWL Maintained emergency Bulkhead c/w self adhesive ISO Legend kit

Order code

4-844110-M
4-844110/EM3
4-844110/EM3/EC
4-844110/EM3/ISO