


IP65 LED Wall/Ceiling Mounted Luminaire

Wideon

Description

Wideon IP65 LED wall or ceiling mounted luminaire is corrosion and vandal resistant. Die Cast Aluminium housing as standard with a competitive cost saving option of polycarbonate housing if required, both complete with UV stabilised impact resistant opal diffuser and silicone rubber gasket. Available in 3000K and 4000K and integral emergency. Please contact us for more details

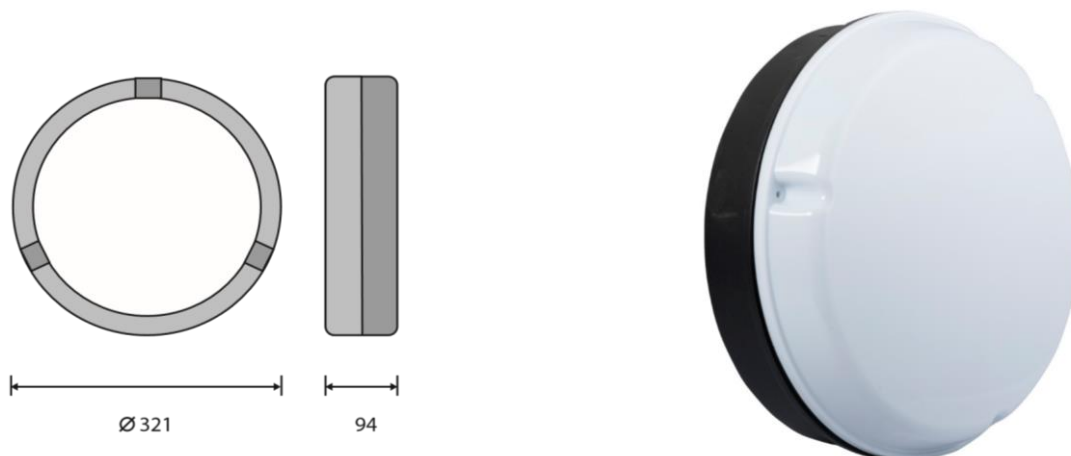

Options

Description

Black finish
Polycarbonate Housing
Silver finish
Anthracite Grey
4000K
3000K
DALI Dimmable
1-10V
Microwave sensor
Emer 3 hour integral
EMPRO Emergency
Self Test

Add to part code

Standard
/P
/SV
/AG
Standard
/3K
/DALI
/1-10V
/MS
/EM3
/EMPRO
/ST

Information

Light Source: LED
Wattage: Various see options
Housing: Die Cast Aluminium Standard
Diffuser: Polycarbonate Opal
Colour Rendering: CRI>80
Ambient Temperature: -20°C to 50°C
IP rating : IP65
Insulation Class: Class 1 - EN60598
Control: DALI driver available
Lifetime: 50,000 hours

Standard options

1670lm 4000K 8.6
2300lm 4000K 12.5W
3192lm 4000K 21.9W

Order code

27843108
27843112
27843121