


Fully adjustable double LED Recessed

Artic 2

Description

Artic 2 is a double LED frame luminaire, fully adjustable with exceptional efficacy of up to 131lm/W. For Artic 1 (Single) and Artic 3 (Triple) versions please see separate data sheet. Various housing and luminaire colour options as standard but can be any RAL colour. Ra90 as standard with option of Ra80, 3000K or 4000K available, Integral emergency and dimming also available.

The Artic range is popular for retail installations, restaurants, reception areas and many other applications. (Please email for more details if survey required)

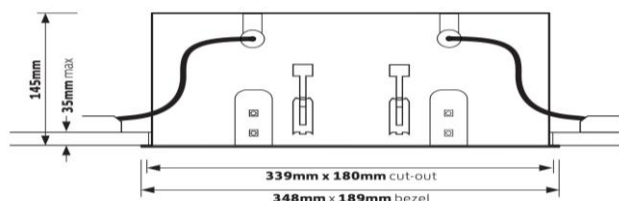

Options

Information

Description

Add to part code

White RAL9016	Standard
Black RAL9005	/BLK
Colour options	Available on request
DALI Dimmable	/DALI
Emer 3 hour remote	/EM3
Medium Beam Multi faceted 40°	Standard
Narrow Beam Multi faceted 25°	/NB
Wide Beam Multi faceted 60°	/WB
Specular Beam 40°	/SPB
Satin Beam 50°	/SB

Light Source:

LED

Wattage:

Various see options

Housing

Die-cast aluminium

Reflector

Multi-faceted

MacAdam

3SDCM

Power Factor

>0.9

IP rating :

IP20

Control:

DALI driver available

Weight:

1.7kg

Ambient temp:

-25°C to 35°C

Lifetime:

50,000+ hours

Standard options

Order code

3000K 8W Ra80 1020lm X 2	40183108-2
4000K 8W Ra80 1055lm X 2	40184108-2
3000K 14W Ra80 1725lm X 2	40183114-2
4000K 14W Ra80 1787lm X 2	40184114-2
3000K 19W Ra80 2363lm X 2	40183119-2
4000K 19W Ra80 2442lm X 2	40184119-2
3000K 28W Ra80 3146lm X 2	40183128-2
4000K 28W Ra80 3252lm X 2	40184124-2

Please contact us for any special requirements.